


Installing *Revox B77 PAUSE MEMORY*

Before installing you have the possibility to choose between two different modes for Pause Memory B77:

Jumper = small red bridge connector on the board

1. **Standardfunction**


Jumper on **BOTH** pins
(as delivered):

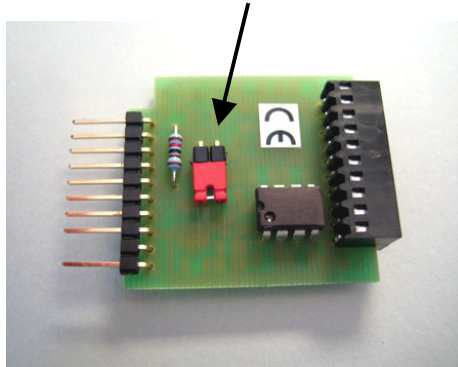


- recording starts immediately
- just Pause Memory is working.
- Pressing any button initiates the desired reel movement

2. **special function**

Jumper **just** to **ONE**
of the pins:


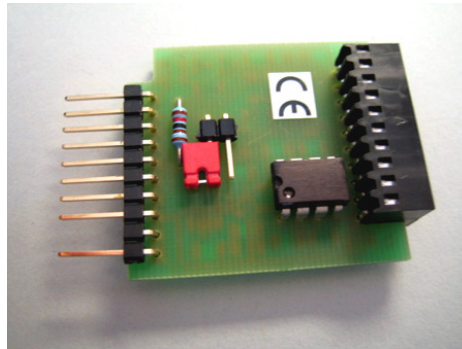


- Connecting the jumper to one pin, you can switch from PAUSE to PLAY or REC, preventing the B77 to start running.
- Recording starts without a clicking sound.
- Reel funktion PLAY or REC is started then by pressing PAUSE button again.

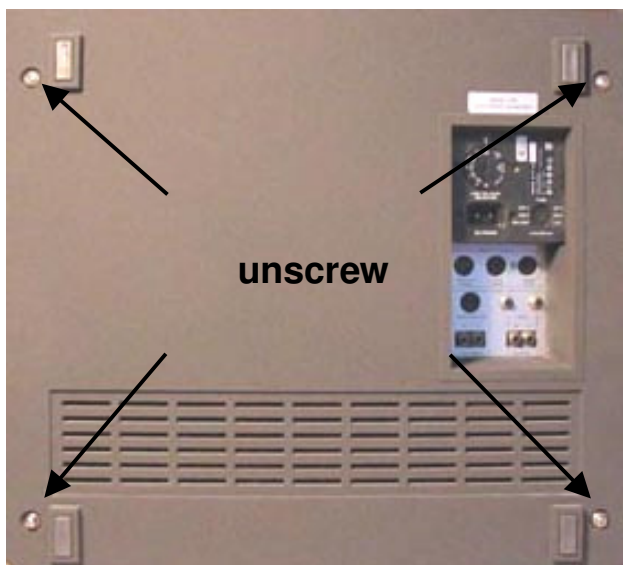


Unscrew the four phillips screws on the backside of the B77 case:


This connector is to be pulled out

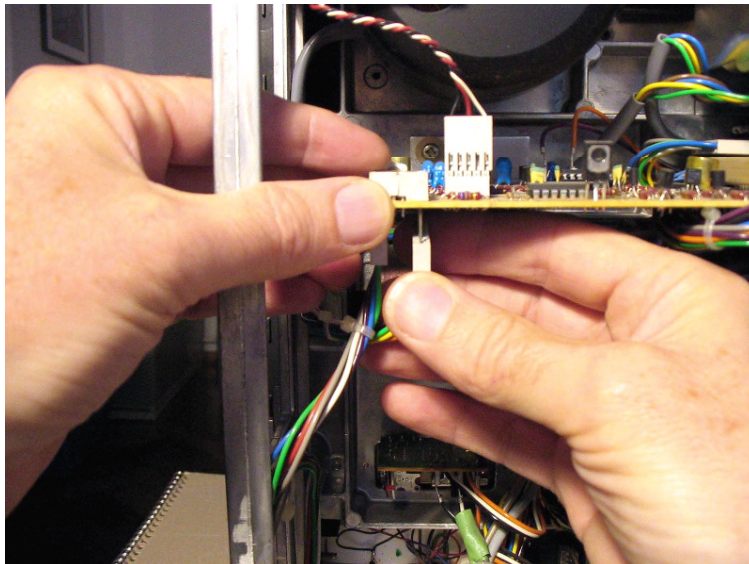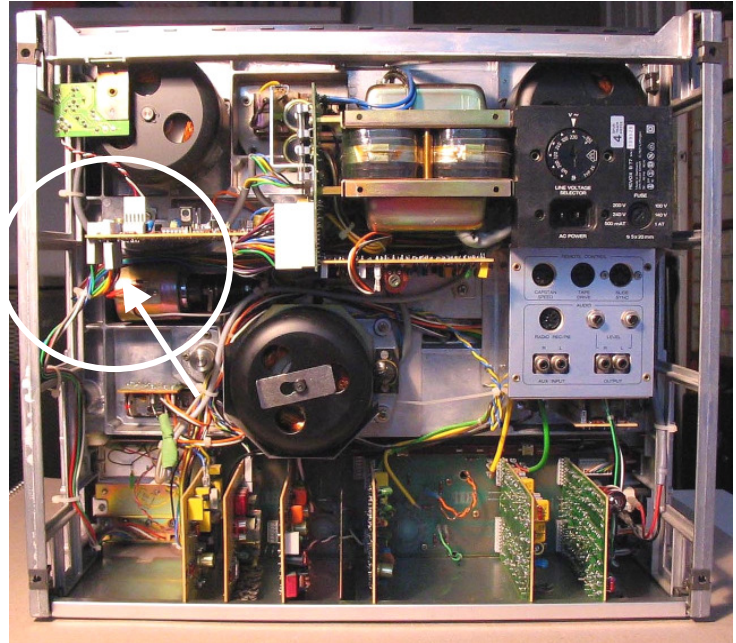

Pull connector downward
stabilize the board with your
other hand



Plug connector
in module B77 Pause
Memory

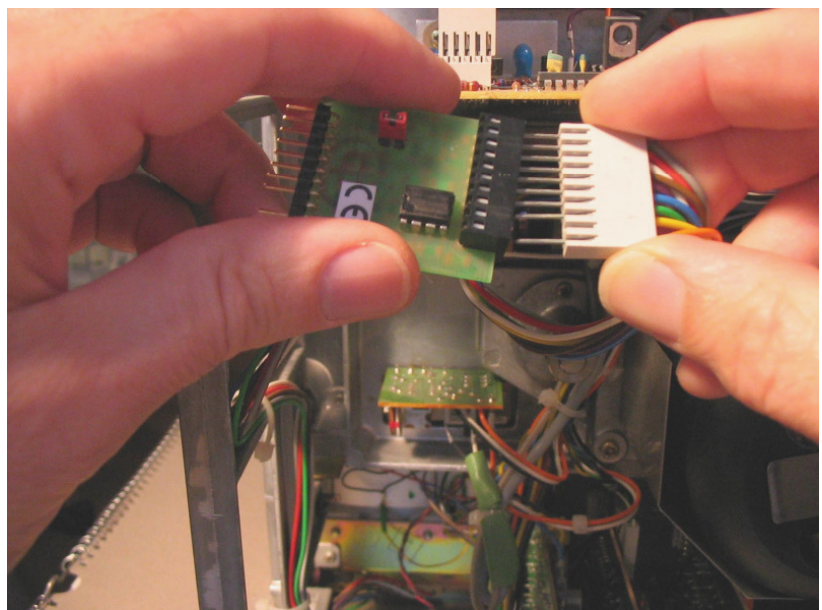

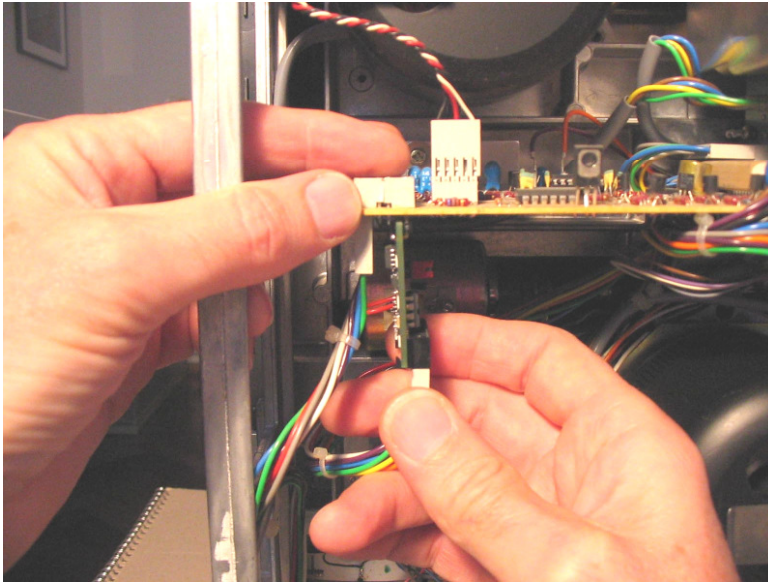

Plug in B77 Pause Memory
using the other hand
for counter-pressure

B77 Pause Memory
installed

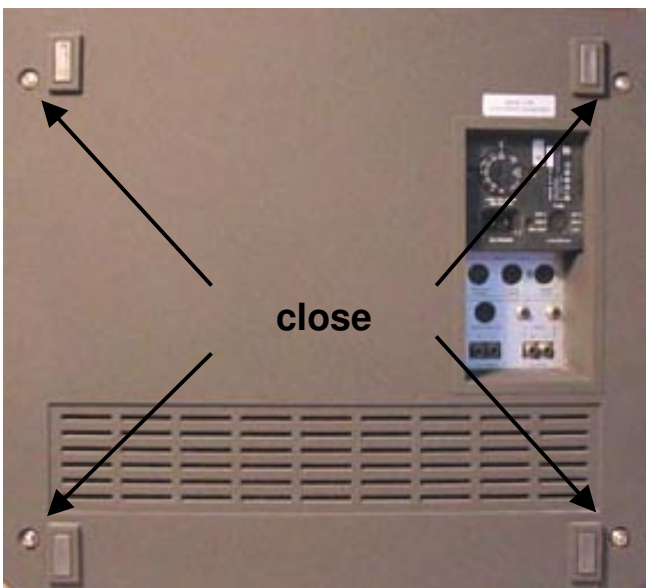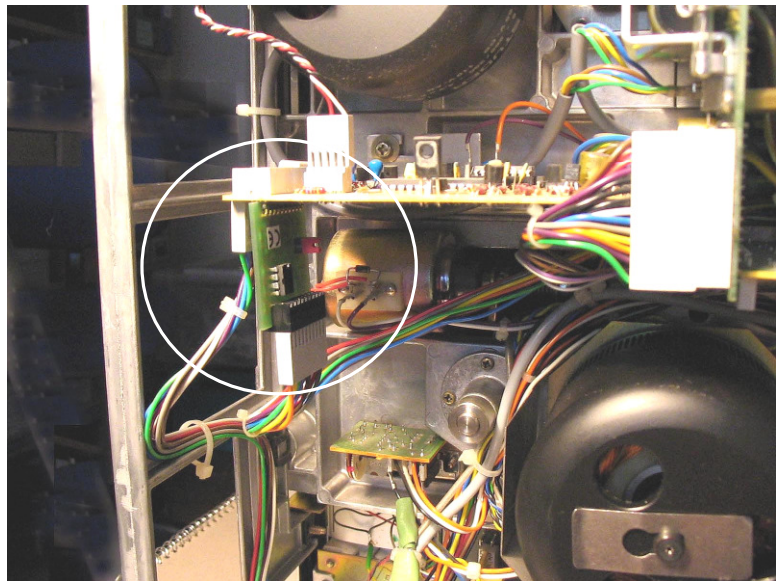

**installing complete –
enjoy your new
Pause Memory !**